


TAP SECURITY

ALUMINUM PROFILE WITH HIGH DENSITY FOAM

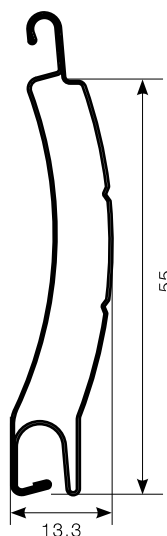

TECHNICAL DATA

Weight per 1m: 0,275 kg approx.


Weight per sqm: 5,10 kg approx.

Profiles per sqm: 18,18


Max sizes: Max width 4,60m;
Max height: 3,00; Max. surface: 11,50sqm

Standard packing: 15 slats 6,51m

ROLLING SHUTTERS



Assembled rolling shutter (punched) with junctions to roll tube, conic stoppers and side plugs (TLSAR132C), standard aluminum end slat TS12X55



Variation: assembled with nails

ROLL DIAMETER

SHUTTER HEIGHT (mm) - with junction spring 5002

	1000	1300	1600	1900	2200	2500	2800	3000	3300	3600	4000
ROLL TUBE 60MM	179	179	195	215	215	235	235	255	255	265	275
ROLL TUBE 70MM	175	175	195	199	215	225	235	240	255	265	275

SHUTTER HEIGHT (mm) - with anti-lifting system SEC

	1000	1300	1600	1900	2200	2500	2800	3000	3300	3500	4000
ROLL TUBE 60MM	179	189	215	215	235	235	255	255	265	275	285
ROLL TUBE 70MM	179	195	199	219	221	235	245	255	265	275	285

OPENING HEIGHT FOR SHUTTERBOX UNIBOX

SHUTTERBOX SIZE JUNCTION SPRING 5002*

	137	150	165	180	205	230	250	300
ROLL TUBE 60MM			700	1080	1900	2490	3200	4000
ROLL TUBE 70MM							3250	4000



*SHUTTERBOX APPLICATION 5

WIND RESISTANCE CLASS

GUIDE RAIL	ROLLING SHUTTER FINISHED WIDTH (mm) - with side plugs									
	4600	4300	4000	3700	3400	3100	2800	2500	2200	1900
TYPE C	1	1	2	2	3	3	4	4	5	6
TYPE D	1	1	2	2	3	3	4	4	5	6

SUITABLE GUIDE RAILS (PAGE 34- PAGE 72)

TO BE USED WITH MAXI PVC GASKET/BRUSH (GG35MAG-SP35MAG)	
TYPE C	Standard system: GS28X117 (replacement)* GE30X27 - GE30X25 - GE30X19 (replacement)
TYPE D	Standard system: GE40X27 - GE60X28 Shutterbox UNIBOX: GE62X28 - GE80X28 - GE458028

**to be used only with GG35NOR*

SUITABLE END SLATS (PAGE 30)

TS12X55	Extruded aluminum end slat 12x55mm
TS12X55U	Extruded aluminum end slat inside/outside rolling 12x55mm
GT	PVC end slat gasket

SUITABLE SECURITY ACCESSORIES (PAGE 45)

SEC60	Anti-lifting security system for roll tube 60mm
SEC70	Anti-lifting security system for roll tube 70mm
SE43I	Handle lock, inside lock (only for TS12X55)
SE43E	Lock with double key hole - inside and outside (only for TS12X55)
CA42AC	Steel security latch (only for TS12X55)
CA32F	Reinforced steel security latch with lock handle
CAT-INT	Intermediate security latch

COLOR RANGE

	10 WHITE	11 RAL 9010	25 WHITE																	
GROUP 1																				
	07 GREY	15 IVORY RAL 1015	29 BEIGE	31 GREY RAL 7038	33 METALL.	34 BROWN	41 BEIGE	42 GREEN RAL 6005	47 CREAM	70 PEARL WHITE RAL 1013	81 GREY ANTH. RAL 7016									
GROUP 2																				
	08 GREY TELE4 RAL 7047	13 CREAM RAL 9001	16 BROWN RAL 8017	28 GREEN RAL 6011	30 OXIDE RED RAL 3009	38 WOOD GRAIN LIGHT	39 WOOD GRAIN DARK	44 BROWN RAL 8019	46 BRONZE	49 WOOD GRAIN CHERRY	53 WOOD GRAIN DOUGLAS	54 RENOLIT DARK	55 WOOD GRAIN MEDIUM	59 BLACK RAL 9005	61 RED RAL 3005					
GROUP 2																				
	64 GREY RAL 7035	65 GREY NCS 3000	66 OCHRE	67 BLUE RAL 5015	68 MINT GREEN RAL 6029	72 LIGHT GREEN RAL 6019	73 LIGHT BLUE VSR050	78 WOOD GRAIN OAK	79 WOOD GRAIN WALNUT	85 LIGHT GREEN RAL 6021	89 BROWN RAL 8003	91 GREY RAFFAELLO	92 GREEN RAFFAELLO	94 BROWN RAFFAELLO	95 TRAFFIC GREY RAL 7043					

Standard end slat TS12X55

Available matching colors for end slats pages 32-33